



Wire Rod

Welding



Thanks to a company history starting already 1873, Fagersta Stainless belongs to one of the world leading producers of stainless wire rod and wire. With customized chemistries the products fulfill everything from simple to high demanding applications.

OPTIMUM WIRE ROD FOR WELDING

To get best possible properties for welding wire rod, following parameters are important:

- Tight chemistry for identical properties
- Mechanical properties and deformation hardening
- Corrosion properties
- Surfaces
- Dimension tolerances

STANDARD STEEL GRADES FOR WELDING

Our grades have tight chemistries and therefore equal properties from delivery to delivery.

We recommend following of our standard grades:

EN. Nr	TYPE / AWS		FAGERSTA	C %	Si %	Mn %	Cr %	Ni %	Mo %	N %	TS N/mm ²	FN WRC 92	PRE
	430 LCb		R 258.10	0.020*	0.40	0.50	18.20	0.30*	0.30*	0.024*	450-550		20
1.4539	385	904L	R 840.70	0.015*	0.35	1.75	20.00	25.00	4.50	0.050	540-640		35
18 8	SiMn	307	R 526.70	0.080	0.87	7.00	18.20	8.00	0.34*	0.060*	550-650	5	20
19 12 3	Nb	ER 318	R 448.11	0.040	0.40	1.80	19.30	11.60	2.60	0.040	590-690	12	29
19 12 3	SiNb	ER 318 Si	R 448.12	0.035	0.75	1.35	18.90	11.80	2.70	0.050	550-650	10	28
19 12 3	L	ER 316 L	R 466.71	0.018*	0.40	1.75	18.60	12.30	2.60	0.030	510-610	9	28
19 12 3	LSi	ER 316 LSi	R 466.72	0.023*	0.90	1.80	18.35	12.25	2.60	0.050	540-640	6	28
19 13 4	L	ER 317 L	R 476.25	0.020*	0.40	1.50	18.80	13.70	3.60	0.050	530-630	7	31
19 9	NbSi	ER 347 Si	R 358.16	0.035	0.85	1.30	19.40	9.80	0.30*	0.040	550-650	10	21
19 9	Nb	ER 347	R 358.22	0.050	0.47	1.80	19.60	9.20	0.30*	0.030	550-650	12	21
19 9	L	ER 308 L	R 366.71	0.023*	0.40	1.80	19.70	10.10	0.30*	0.055	540-640	10	22
19 9	LSi	ER 308 LSi	R 366.72	0.023*	0.90	1.80	19.85	10.35	0.30*	0.065	550-650	8	22
23 12	L	ER 309 L	R 806.20	0.018*	0.42	1.80	23.50	13.70	0.30*	0.080	540-640	9	26
23 12	LSi	ER 309 LSi	R 806.24	0.025*	0.90	1.60	23.30	13.80	0.30*	0.120	560-660	6	27
23 12 2	L	309 LMo	P5 R 816.10	0.015*	0.37	1.50	21.50	15.00	2.70	0.060	530-630	9	31
25 20		ER 310	R 826.70	0.120	0.40	1.75	25.90	20.80	0.30*	0.060*	590-690		27
1.4662		2209	R 646.21	0.013*	0.50	1.60	23.00	8.75	3.15	0.160	760-860	44	37
	312	29-9	R 656.70	0.100	0.40	1.85	30.35	9.20	0.34*	0.055	770-880	55	32

(Other grades from our standard range are displayed on the reverse side)

Cold Heading




Spring



High Temperature



Duplex

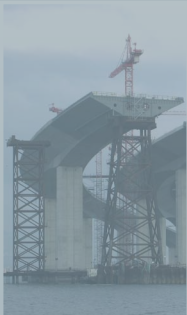

MECHANICAL PROPERTIES AND DEFORMATION HARDENING

Depending on what shape and wished tensile strength an end product shall have, the wire rod should have a specific ductility (formability) for the cold heading process and that it reaches a specific level of deformation hardening. Following methods of measurement are used regarding deformation hardening:

CWH-factor "Cold Work Hardening Factor", a matrix consisting of C, Cr and Ni contents. The factor varies between 80 – 150 and increases with increasing deformation hardening in the steel.

Md30 The temperature (°C) at which 30% true elongation (about 25% area reduction) makes 50% of the austenitic phase transform to deformation martensite. A higher temperature means higher deformation hardening in the steel.

CORROSION

PRE (= Pitting Resistance Equivalent = Cr + 3.1 x Mo + 25 x N) is a factor comparing properties of different chemistries with regards to pitting and crevice corrosion in corrosive environments. A higher value means better resistance. In the table above, PRE is shown for the grades we recommend for welding.

SURFACES

Direct cooling (DK) ASTM 10-13
 "In line"-annealing (DST) ASTM 5-8
 Pit furnace (SG) ASTM 3-6

Our standard procedure is to supply the wire rod in pickled condition.

DIMENSIONS

5.0

18.0

Standard: 5 – 18 mm (.197" - .709") in increments of 0.5 mm (.020")
 (MOQ:s for some dimensions)

Tolerance: 5.0 – 10.0 +/-0.15
 >10.0 – 18.0 +/-0.20

Ovality: Max 60% of the total tolerance span.


Surface classes: Class 3 is the standard class which has a max defect depth of 0.10 mm for dimensions ≤ 10 mm and 1% of the diameter for dimensions > 10 mm. Welding rod has class 2 (max 0.20).

PACKAGING METHODS

Coil weight: Appr. 1000 kg

Outer diameter: Max 1250 mm

Inner diameter: Max 950 mm

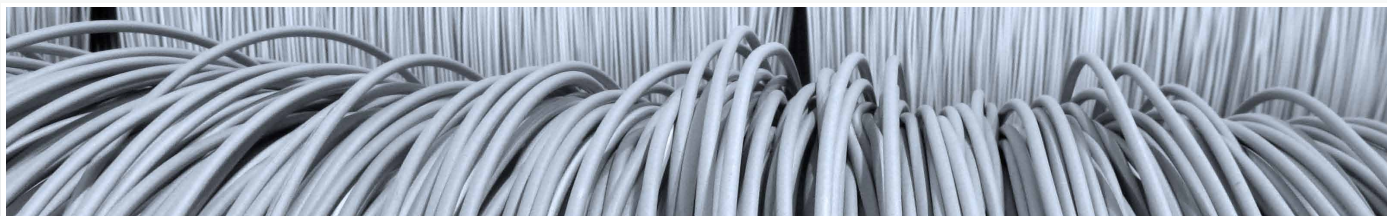

Structure	STEEL GRADES													CWH	Md30	PRE	USAGE							
	EN. Nr	TYPE / AWS	Designation	FAGERSTA													Nohara	°C	Welding	Cold heading	Spring	High temperature	Bright forming	Spoke
				C	Si	Mn	Cr	Ni	Mo	N	Others													
				%	%	%	%	%	%	%	%	%	%											
Ferritic		409 Cb		R 108.10	0.030	0.60	0.60	11.30	0.35	0.10*	0.040*	Nb 0.50				12	•							
	1.4512	409 Ti		R 109.11	0.030*	0.50	0.55	11.30	0.50*	0.10*	0.040*	Ti 0.75				12	•		•					
	1.4016	430		R 250.11	0.020*	0.30	0.70	16.40	0.30*	0.10*	0.030*					17	•				•			
	1.4016	430		R 250.17	0.050	0.40	0.50	16.80	0.30*	0.50*	0.050*					17						•		
	1.4016	430		R 250.30	0.020*	0.30	0.70	16.40	0.30*	0.10*	0.050					17	•					•		
		430 LCb		R 258.10	0.020*	0.40	0.50	18.20	0.30*	0.30*	0.024*	Nb 0.45				20	•							
		439 Ti		R 259.12	0.020*	0.70	0.70	17.50	0.25*	0.10*	0.025*	Ti 0.40				18	•							
	446		R 270.70	0.050	0.50	1.00	23.90	0.50*	0.54*	0.085					27									
Austenitic	1.4301	302		R 320.14	0.050	0.40	0.75	17.80	8.60	0.60*	0.035			120	-1	19	•							
	1.4301	304		R 350.19	0.030	0.40	1.50	18.20	8.20	0.60*	0.050*			108	9	20	•				•	•		
	1.4303	305		R 390.21	0.015*	0.40	0.55	17.70	11.20	0.60*	0.030*			91	-47	19	•							
	1.4307	304 L		R 350.20	0.025*	0.45	1.20	18.50	9.75	0.60*	0.030*			90	-25	20	•							
	1.4307	304 L		R 350.43	0.020*	0.50	1.15	18.30	8.50	0.60*	0.060*			93	2	20	•					•		
	1.4310	302		R 300.15	0.100	1.10	1.25	16.80	7.70	0.65	0.045			149	-5	20			•					
	1.4310	302		R 300.20	0.052	0.45	1.20	17.40	8.25	0.60*	0.050			128	4	19			•			•		
	1.4310	302		R 300.31	0.100	0.90	1.25	17.30	8.20	0.60*	0.030*			139	-8	19			•					
	1.4310	302		R 320.17	0.070	0.45	1.25	18.35	8.10	0.60	0.040			130	-10	20			•					
	1.4372	201		R 520.12	0.090	0.45	5.90	17.00	5.30	0.60*	0.070					20						•		
	1.4401	316		R 420.18	0.050	0.35	1.55	16.80	10.70	2.10	0.060*			102	-85	24			•					
	1.4404	316 L		R 425.10	0.020*	0.35	1.55	16.80	11.20	2.10	0.050*			92	-90	24			•			•		
	1.4436	316 L		R 440.10	0.030*	0.50	1.55	16.80	11.60	2.60	0.050*			91	-103	26			•					
	1.4539	385	904 L	R 840.70	0.015*	0.35	1.75	20.00	25.00	4.50	0.050	Cu 1.50					35	•			•			
	1.4541	321		R 359.10	0.030	0.50	1.15	17.80	9.20	0.60*	0.020*	Ti 0.35		94	5	19			•					
	1.4547		254 SMO	R 847.10	0.018*	0.35	0.45	19.90	17.90	6.10	0.200	Cu 0.70					44				•			
	1.4567	304 Cu	302 HQ	R 575.21	0.015*	0.40	0.55	17.90	9.70	0.40*	0.025*	Cu 3.50					19			•				
	1.4571	316 Ti		R 429.15	0.030*	0.40	1.75	16.60	10.60	2.10	0.030*	Ti 0.20		94	-58	24								
	1.4578	316 Cu		R 545.11	0.030*	0.35	0.55	17.00	10.80	2.20	0.040*	Cu 3.20					25			•				
	1.4828			R 323.10	0.045	1.95	1.20	19.30	11.70	0.60*	0.030			93	-130	21						•		
	1.4835		253 MA	R 327.10	0.075	1.60	0.50	21.00	10.20	0.30*	0.165	Ce 0.055					26					•		
				R 823.11	0.030*	2.70	1.75	23.50	19.40	0.60*	0.060*						26					•		
	1.4841	314		R 823.13	0.020*	2.25	1.75	24.30	20.70	0.50*	0.050*						26					•		
	1.4845	310 S		R 820.10	0.045	0.65	1.50	24.70	19.40	0.60*	0.050*						26					•		
	1.4864			R 860.10	0.030*	1.25	1.80	15.30	33.50	0.60*	0.070						18					•		
	1.4886	330		R 860.13	0.030*	1.25	0.75	18.50	34.50	0.50*	0.060*						21					•		
			Incoloy DS	R 863.13	0.030*	2.30	1.20	18.00	36.50	0.50*	0.070						21					•		
		330 Cb	35-19 Cb	R 868.11	0.025*	1.85	0.50	19.50	34.50	0.30*	0.060*	Nb 0.87					21					•		
		18 8 SiMn	307	R 526.18	0.070	0.90	6.90	19.10	8.80	0.30*	0.045						21	•						
		18 8 SiMn	307	R 526.70	0.080	0.87	7.00	18.20	8.00	0.34*	0.060*	S 0.009					20	•						
	19 12 3 Nb	ER 318		R 448.11	0.040	0.40	1.80	19.30	11.60	2.60	0.040	S 0.011	Nb 0.62				29	•						
	19 12 3 SiNb	ER 318 Si		R 448.12	0.035	0.75	1.35	18.90	11.80	2.70	0.050	S 0.011	Nb 0.65				28	•						
	19 12 3 L	ER 316 L		R 466.10	0.015*	0.40	1.75	18.30	12.20	2.60	0.040	S 0.010					27	•						
	19 12 3 L	E 316 L		R 466.70	0.018*	0.12	1.75	18.40	11.45	2.65	0.040	S 0.011					28	•						
	19 12 3 L	ER 316 L		R 466.71	0.018*	0.40	1.75	18.60	12.30	2.60	0.030	S 0.010					28	•						
	19 12 3 LSi	ER 316 LSi		R 466.72	0.023*	0.90	1.80	18.35	12.25	2.60	0.050	S 0.011					28	•						
	19 13 4 L	ER 317 L		R 476.25	0.020*	0.40	1.50	18.80	13.70	3.60	0.050	S 0.010					31	•						
	19 9 NbSi	ER 347 Si		R 358.16	0.035	0.85	1.30	19.40	9.80	0.30*	0.040	S 0.010	Nb 0.60				21	•						
	19 9 Nb	ER 347		R 358.22	0.050	0.47	1.80	19.60	9.20	0.30*	0.030	S 0.009	Nb 0.60				21	•						
	19 9 H	ER 308		R 326.12	0.050	0.40	1.80	20.25	9.25	0.30*	0.050	S 0.010					23	•						
	19 9 L	ER 308 L		R 366.10	0.015*	0.40	1.80	19.70	10.20	0.20*	0.050	S 0.011					21	•						
	19 9 L	ER 308 L		R 366.19	0.020*	0.20*	1.80	19.90	10.10	0.24*	0.050						21	•						
	19 9 L	E 308 L		R 366.70	0.012*	0.12	1.80	20.00	10.00	0.10*	0.040	S 0.008					21	•						
	19 9 L	ER 308 L		R 366.71	0.023*	0.40	1.80	19.70	10.10	0.30*	0.055	S 0.011					22	•						
	19 9 LSi	ER 308 LSi		R 366.72	0.023*	0.90	1.80	19.85	10.35	0.30*	0.065	S 0.011					22	•						
	23 12 L	ER 309 L		R 806.20	0.018*	0.42	1.80	23.50	13.70	0.30*	0.080	S 0.010					26	•						
	23 12 LSi	ER 309 LSi		R 806.24	0.025*	0.90	1.60	23.30	13.80	0.30*	0.120	S 0.010					27	•						
23 12 2 L	309 LMo	P5	R 816.10	0.015*	0.37	1.50	21.50	15.00	2.70	0.060						31	•							
25 20	E 310		R 826.20	0.100	0.45	1.75	25.90	20.80	0.30*	0.060*						27	•							
25 20	ER 310		R 826.70	0.120	0.40	1.75	25.90	20.80	0.30*	0.060*						27	•							
Duplex	1.4162		2101	R 617.10	0.030	0.70	5.00	21.50	1.50	0.30	0.220	Cu 0.30				28					•			
	1.4362		2304	R 630.10	0.015	0.45	0.95	22.50	4.70	0.25	0.110	Cu 0.20				26								
	1.4362		2304	R 630.21	0.015	0.45	0.95	22.50	4.70	0.25	0.110	Cu 0.20				26								
	1.4662		2209	R 646.21	0.013*	0.50	1.60	23.00	8.75	3.15	0.160					37	•							
	1.4462		2205	R 647.70	0.017	0.50	0.85	22.20	5.20	3.20	0.180					37								
	312	29-9	R 656.70	0.100	0.40	1.85	30.35	9.20	0.34*	0.055						32								